

© CT Creative Technology, Germany

Up to the challenge, the STEALTH™ video display is ideal for achieving stunning effects in ambitious locations.

This lightweight, transparent LED system is comprised of modular panels, integrated power and data distribution, rigging hardware, and video processing. The panels are 400 millimeters square, weigh one kilogram, and contain 256 pixels on a 25 millimeter pitch.

STEALTH screens can be fan-folded directly into and out of touring cases, speeding up installation and breakdown. Robust yet lightweight, STEALTH can be assembled into extremely large displays whether flat or curved, horizontal or vertical. Minimal framework provides an entire structure with virtual transparency.

The STEALTH video display has been proven in both temporary and permanent installations, including concert tours, architectural installations, film and television sets, and events.

LIGHTWEIGHT

**FOLDS FOR STACKING
AND SHIPPING**


TRANSPARENT

MODULAR

EASY SET UP



STEALTH™

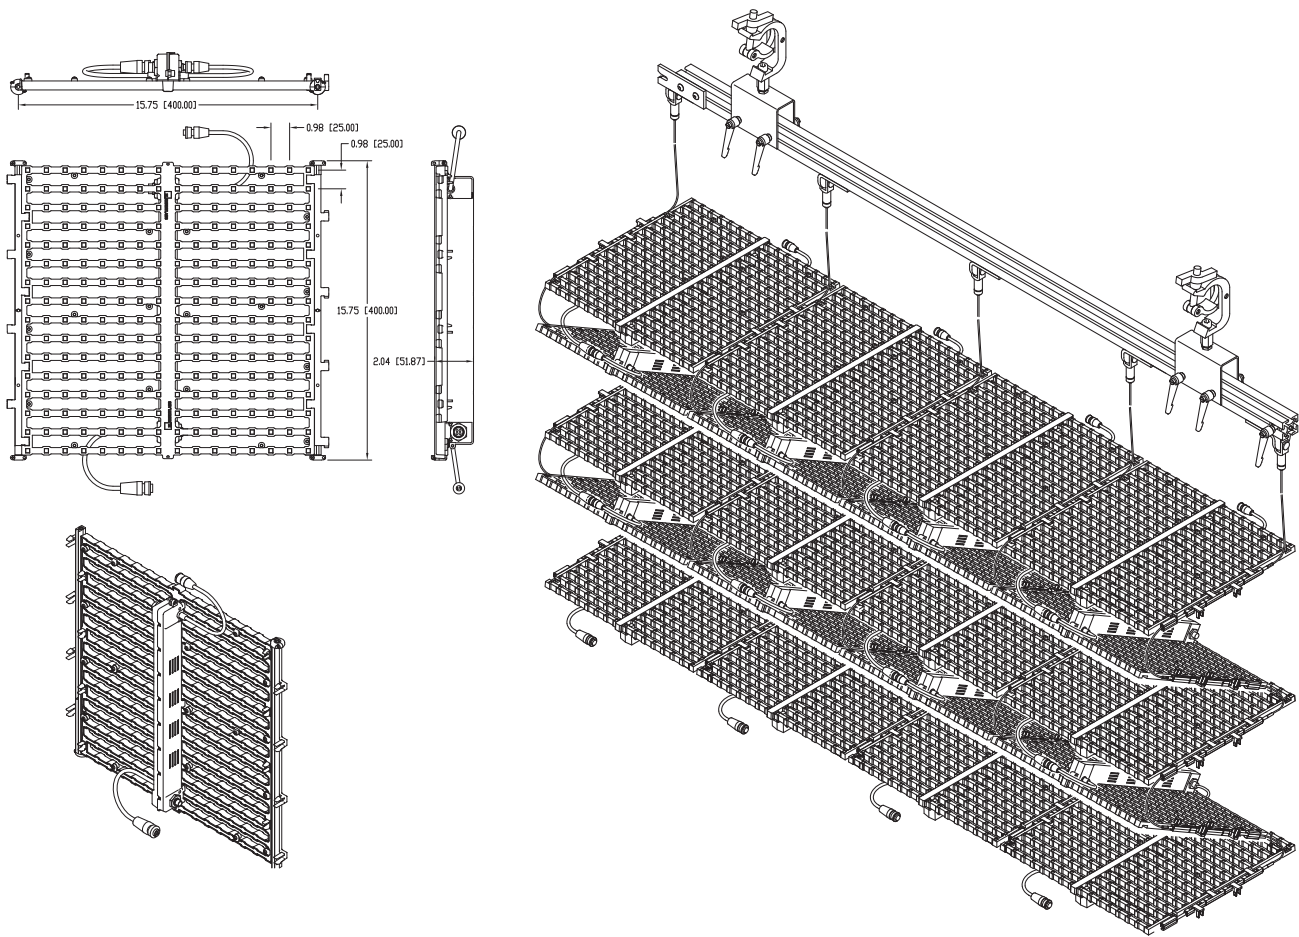

Specifications

Resolution	25 mm pixel pitch
Colors	Over 1 billion (48-bit)
Output	2400 nits (average), 3600 nits (max)
Transparency	60% (aperture ratio)
Panel color	Black or white
Power	70 watts/panel
Dimensions	Length 398.5 mm (15.69 in.) Width 38.5 mm (1.52 in.) Height 400.0 mm (15.75 in.)
Weight	1.0 kg (2.20 lbs.)

North America
+1 512 491 9111

London
+44 20 7749 0611

Germany
+49 5331 905660

www.elementlabs.com
info@elementlabs.com